



L'Énergie Sans Limite !
Safe Energy for Life !



Portable Energy Bank

From 1200 to 6000 W

Electric, electronic and IT hardware power protection manufacturer

www.infosec-ups.com



Mobile Power Station, mega capacity in compact size on the wheel

- Available in 1200, 2500 and 3000 W and up to 6000 W (with 2 x 3kW in parallel)
- Power 99% of your home appliances
- Scalable output power from 3 kW to 6 kW
- Expandable battery capacity from 2.5 kWh to 7.5 kWh
- Super fast recharge, 0-90% in one hour



Power Your Entire House by Renewable Energy

- Dual input power sources, grid and solar power
- Scheduled charging, charged by grid during off-peak hours
- Charging source priority setting, solar or grid
- Output source priority setting, solar, battery or grid



1200 / 2500 W



3000 W



3000 W + 1 battery module




3000 W + 2 battery modules

Portable Energy Bank

- Sinewave AC output Lithium-ion battery bank
- 40A (1200W), 100A(2500W) built-in AC charger
- 40A (1200W), 100A(2500W) built-in solar charger
- ultra fast fully charging in one hour
- 4 or 5 AC outlets, 4 DC outputs, terminal block for 3 kW
- Dual inputs, grid and solar
- Expandable to 6k output power for 3kw
- Expandable battery capacity to 7.5kWh for 3kw
- Built-in battery management system (BMS)
- Wifi + APP, remote control & monitor daily power consumption

Power 99% of home appliances during long blackout

- Power 9 devices at the same time for one hour and more



- Power most essential appliance over 24 hours



- Backup time or charge times

Heater 700 W 3 Hrs	Refrigerator 120 W 17-35 Hrs	Microwave 1150 W 1.75 Hrs	TV 140 W 20 Hrs	Light 20 W 77 Hrs
Wi-Fi router 10 W 77 Hrs	Fan 40 W 40 Hrs	Mobile phone 11 Wh 222 Charges	Laptop 100 Wh 40 Charges	


Highly mobility and Plug & Use

If you need to relocate the energy bank, simply unplug it and move it anywhere.



Peak cut


Store the power at night when the utility is generally cheaper and more available and discharge power when needed.

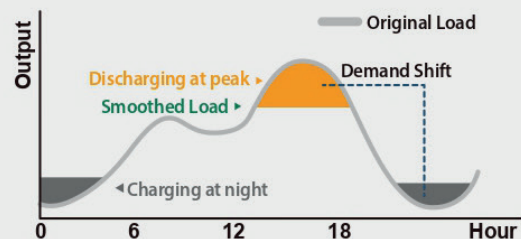

3000W solar input, fully charging in one hour without compromise




0 – 90% in one hour
Built-in 100A big charger, fully charged in one hour

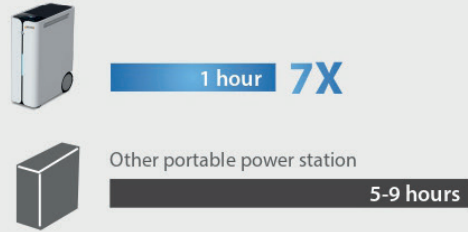

Expand output power with 2 energy banks in parallel




Expandable capacity from 2.5kwh to 7.5kwh

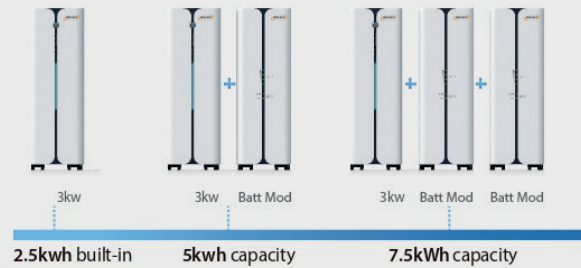


WiFi & APP



Outlook

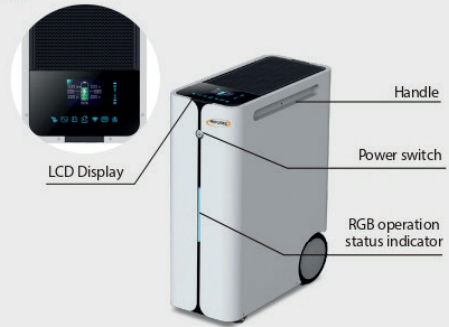

System Diagram

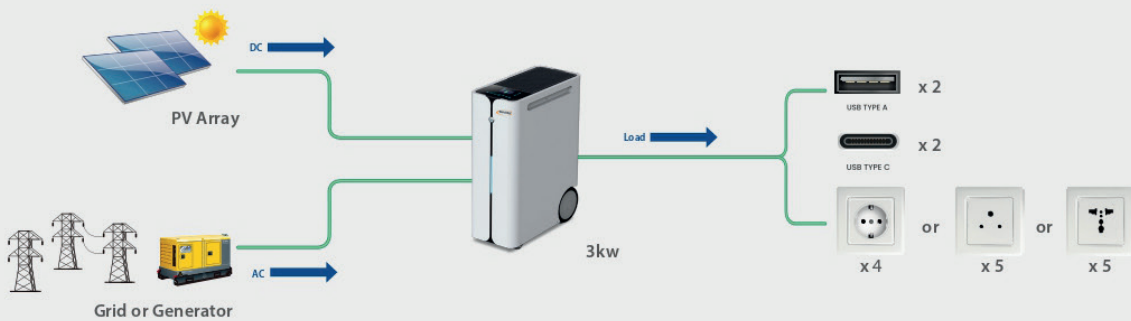

Portable Energy Bank Selection Guide

Model	1200 W	2500 W	3000 W
Rated Inverter Power	1200VA/1200W	2500VA/2500W	3000VA/3000W
INPUT			
Voltage		230 VAC	100VAC/110VAC/120VAC or 220VAC/230 VAC/240VAC
Selectable Voltage Range	170-280 VAC (For Computers); 90-280 VAC (For Home Appliances)		75-130 VAC (For Computers); 60-140 VAC (for Home Appliances) or 170-280 VAC (For Computers); 90-280 VAC (For Home Appliances)
Frequency Range	50 Hz/60 Hz (Auto sensing)		
OUTPUT			
AC Voltage Regulation (Batt. Mode)		230VAC ± 5%	100VAC/110VAC/120VAC ± 5% or 220VAC/230VAC/240VAC ± 5%
Surge Power	2400VA	5000VA	6000VA
Efficiency (Peak)	90% ~ 93%		93%
Transfer Time	10 ms (For Personal Computers), 20 ms (For Home Appliances)		
Waveform	Pure Sine Wave		
SOLAR CHARGER & AC CHARGER			
Solar Charger type		MPPT	
Maximum PV Array Power	2000W	3000W	3000W
MPPT Range @ Operating Voltage	60-300 VDC	60-400 VDC	60~ 400 VDC
Maximum PV Array Open Circuit Voltage	350 VDC	450 VDC	450 VDC
Maximum Solar Charge Current	40A	40A	100A
Maximum AC Charge Current	40A	40A	100A
Maximum Charge Current	40A	40A	100A
BATTERY			
Energy	768Wh	1536Wh	2500Wh
Nominal Voltage	25.6 VDC	51.2 VDC	25.6VDC
Full Charge Voltage (FC)	29.2V	58.4V	29.2V
Full Discharge Voltage (FD)	20V	40V	20V
Typical Capacity	30 Ah	30 Ah	100Ah
Max Continuous Discharging Current	60A	60A	120A
Max Discharging Current	65A	65A	200A
Protection	BMS	BMS	BMS, Breaker
Maximum Charge Current	40A	40A	100A (1C)
Inner Resistance		≤0.6m ohm	
Lifecycle	≥ 2500 cycles , 0.5C charging/discharging ≥ 80% @EOL 100% DoD		≥3500 cycles, 0.5C charging/ discharging ≥80% @EOL 100% DoD
PHYSICAL			
Dimension, D X H X W (mm)		420 x 350 x 330	450 x 600 x 222
Net Weight (kgs)	15	20	34
STANDARD			
Compliance Safety	IEC/EN 62109-1/-2, EN 61000-6-4, EN-61000-6-2 IEC 62619, EN 61000-6-3, EN 61000-6-1, UN38.3		

Expandable battery module for 3KW

BATTERY MODEL	
Energy	2500Wh
PARAMETERS	
Norminal Voltage	25.6VDC
Typical Capacity	100 Ah
Rated Discharging Current	120A
PHYSICAL	
Battery Module Dimension, D X H X W (mm)	450 x 600 x 222
Net Weight (kgs)	25
STANDARD	
Compliance Safety	IEC 62619, UN38.3