




L'Énergie Sans Limite !  
Safe Energy for Life !

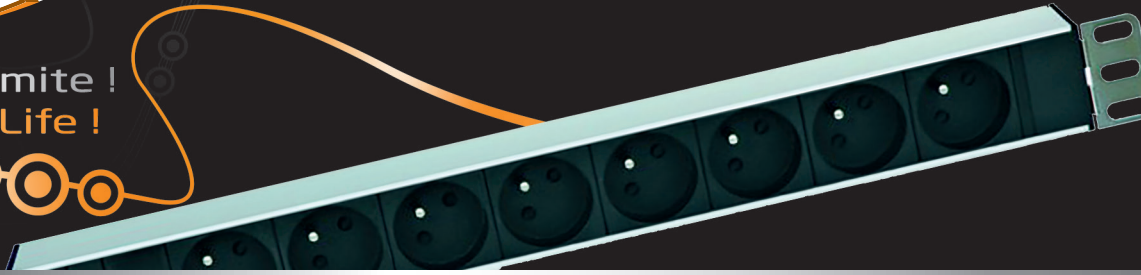

## Mountable electrical distribution panel

# P D U


Rack PDU are mountable electrical distribution panels that allow to connect electrical equipment in a 19" rackmount server cabinet. Available in different versions, they fit different needs and their rack format is designed to be integrated in 19" bays.

### CLASSICAL DISTRIBUTION PANELS



#### L6 RM

- 6 FR (2P+T) outlets PDU
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- 45° to 90° swiveling fastening bonds on the 4 sides
- 24mm-backwards fastening possible

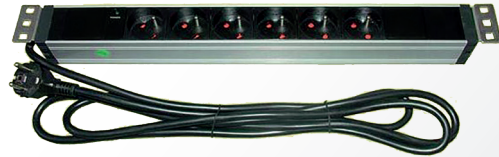

#### L9 RM

- 9 FR (2P+T) outlets PDU
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- Fix fastening bonds



#### L4 RM

- 4 FR (2P+T) outlets PDU
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- Fix fastening bonds

#### L6 RM plus

- 6 FR (2P+T) outlets PDU
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- Fix fastening bonds
- Circuit breaker

#### L8 RM

- 8 FR (2P+T) outlets PDU
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- 45° to 90° swiveling fastening bonds on the 4 sides
- 24mm-backwards fastening possible

# SPECIFIC DISTRIBUTION PANELS

## L8 RM C14

- 8 FR (2P+T) outlets PDU 19"
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- 45° to 90° swiveling fastening bonds on the 4 sides
- C14 input cable (IEC-10A M)
- For an IEC-10A C13 output UPS



## L9 RM C20

- 9 FR (2P+T) outlets PDU 19"
- LED indicator
- Security valve
- Screws and bolts for an integration in a 19" bay
- Fix fastening bonds
- C20 input cable (IEC-16A)
- For an IEC-16A C19 output UPS



## L10 RM C14

- 19" PDU with 10 IEC outlets C13 (10A)
- LED indicator
- Screws and bolts for an integration in a 19" bay
- 45° to 90° swiveling fastening bonds on the 4 sides
- IEC C14 (10A) - 2.5 m input cable
- For an IEC-10A C13 output UPS

## L10 RM C20

- 19" PDU with 10 IEC outlets C13 (10A)
- LED indicator
- Screws and bolts for an integration in a 19" bay
- 45° to 90° swiveling fastening bonds on the 4 sides
- IEC C20 (16A) - 2.5 m input cable
- For an IEC-16A C19 output UPS

## L18 VM plus

- 18 FR (2P+T) outlets vertical PDU
- Security valve
- Fix fastening bonds
- Input cable (2m) with a M5 - loop terminal
- 2 circuit breakers (1 for every 9 outlets)
- For a connection to an output UPS with terminal from 5kVA



## L20 VM plus

- 20 IEC outlets vertical PDU - C13 (10A)
- Security valve
- Fix fastening bonds
- Input cable with a M5 - 2 m loop terminal
- 2 circuit breakers (1 for every 10 outlets)
- For a connection to an output UPS with terminal from 5kVA



## TECHNICAL SPECIFICATIONS

For any additional information, please contact us.

	L4 RM	L6 RM	L6 RM plus	L8 RM	L9 RM
--	-------	-------	------------	-------	-------

### STANDARD PDU - GENERAL FEATURES

Type of outlets	FR				
Number of outlets	4	6	6	8	9
Voltage	230VAC 50/60Hz				
Power	16A/3680W				3680W
Cable length (cm)	180	250			
Dimensions hxlxl (mm)	44.4 x 255 x 44.4	45 x 485 x 45	44.4 x 485 x 46.5	45 x 485 x 45	45 x 485 x 45
Weight (kg)	0.62	0.85	1.20	0.86	0.86
Fastening	Rack (horizontal)				
PN	61470	61471	61472	61473	61474

	L8 RM C14	L9 RM C20	L10 RM C14	L10 RM C20	L18 VM plus	L20 VM plus
--	-----------	-----------	------------	------------	-------------	-------------

### SPECIFIC PDU - GENERAL FEATURES

Type of outlets	FR		IEC		FR	IEC
Number of outlets	8	9	10		18	20
Voltage	230VAC 50/60Hz					
Power	10/2300W	16/3680W	10/2300W	16/3680W	16/3680W x2	
Cable length (cm)	250				200	
Dimensions hxlxl (mm)	45 x 485 x 45	45 x 485 x 45	44.4 x 485 x 46.5	44.4 x 485 x 46	1100 x 44.4 x 44.4	
Weight (kg)	0.86	0.9		2.20	2	
Fastening	Rack (horizontal)				Vertical	
pn	61475	61476	61477	61478	61479	61480



**Infosec Communication**  
 15, rue du Moulin  
 44880 SAUTRON - FRANCE  
**Sales Contact**  
 Tel : 02 40 76 11 77  
 sales@infosec.fr

www.infosec-ups.com

