

Digital Leisure



Handy and user-friendly surge protectors designed to increase your electrical devices' lifespan.

The Black Line II range, available with 4, 5 and 6 outputs, provides you with a reliable protection against voltage surge and lightning risks

Surge and voltage peaks are very often responsible for the loss of data or bugs caused to computer. Repeated magnetic disturbance can irreversibly damage domestic appliances and critical electronic devices.

• An appropriate solution

S Black Line II range is equipped with 4, 5 or 6 French-type outputs in order to adapt to any configuration. Domestic appliances can be powered in full safety: TV, Home Theater, videogames, Hi-Fi installation...

A complete and safe solution

With a switch including a 10 A resettable thermal circuit breaker, the S Black Line II product range guarantees a reliable protection against overloads.

User-friendly with a discreet design

With its 1.5 m-long cable, Black Line II surge protectors range will match your living room's style with simplicity. They are also equipped with a wall-fixing system, and as a standard, they feature a children-safety protection.

Environment-friendly conception



S4 Black Line II

S5 Black Line II

S6 Black Line II







French type outlets



Surge protection



Children safety shutters




Infosec started an environment-friendly approach through the **ISO 14001** certification, and commits to search for new, greener processes.

Therefore, the packagings of the new surge protectors collection have been manufactured with **Green PVC**, a much lighter material, and includes **more environment-friendly and less polluting components** than standard PVC. Cardboard boxes and printed paper are made of more than 50% of recycled paper which can be selectively sorted.



WORKING DIAGRAM

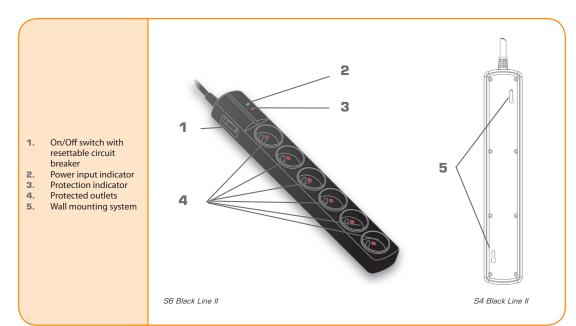



Package content

- · Surge protector
- Trilingual user's manual (GB/FR/AR)

Insurance

Connected equipments protection amounting €2 500.



See detailed conditions and registration procedure on the website (within 10 days of purchase).

TECHNICAL SPECIFICATIONS

	S4 Black Line II	S5 Black Line II	S6 Black Line II
CARACTERISTIQUES GENERALES			
Туре	Class I, type 3, IP20		
Number of protected outlets	4	5	6
Circuit breaker		10A	-
Child proof safety shutters	yes		
Durable fire prevention plastic housing	yes		
Dimensions (Lxlxh in mm)	256 x 53 x 39.5	300 x 53 x 39,5	344 x 53 x 39,5
Veight (g)	400	430	470
Cable length (m)		1.5	
Cable type	3 x 1 mm ²		
ELECTRICAL SPECIFICATIONS			
Nominal voltage	250VAC, 50Hz		
Clamping voltage	775 V		
Vlaximum power	2500 W		
Surge energy rating	175 J		
Peak current	6 000 A		
Response time	<1 ns		
LEDS			
«Power input» LED	Red LED		
Protected» LED	Green LED		
EMI/RFI FILTER			
Frequency range	150 kHz ~ 100 MHz		
Reduction	Up to 75 dB		
ENVIRONMENT			
Temperature	from-5°C to +40° C		
Humidity	from 0 to 40 %		
NORMS			
Standard	CE RoHS		
EMC	EN 61000-6-3:2007+A1:2011 ; EN 61000-6-1:2007 ; EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2013		
LVD	IEC 60884-2-5:1995 ; IEC 61643-1:2005		
SALES INFORMATION			
Warranty	2 years		
Insurance for connected devices	€ 2500		
PN	61294	61295	61296

Warranty

2-year warranty against manufacturing defects under normal conditions and compliance with precautionary measures.

2- year Warranty

Warranty to be taken out on www.infosec-ups.fr within 15 days of purchase.



Infosec Communication

15, Rue du Moulin 44880 SAUTRON - FRANCE

Contact commercial
Tél: 02 40 76 11 77
commercial@infosec.fr









