



PRODUCT LISTING

March 2024

UPS, INVERTERS,
REGULATORS & SURGE PROTECTORS



Infosec Communication is certified ISO 9001 & 14001, a guarantee of its commitment to customer satisfaction and the environment.

Certified quality and environmental management system ISO 9001:2015 and ISO 14001:2015.



Discover our product catalogue

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATION : DIGITAL ENTERTAINMENT & AUTOCOMS



Series	Model	SKU	Power	Features	Communication	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
Z1 ZenCube EX : Tower UPS - High Frequency Technology										
	Z1 ZenCube EX 400	66072	400 VA	3 FR/SCHUKO backup outlets 2 visual indicators		120 000 €	2 years	166 x 161 x 86.7	2,3	9
	Z1 ZenCube EX 600	66073	600 VA						2,5	9
Z2 EX : Tower UPS - High Frequency Technology										
	Z2 EX 550	66085	550 VA	6 FR/SCHUKO outlets (3 backup + 3 surge-protected) 1 visual indicator	USB Port Software (free download)	120 000 €	2 years	309 x 110 x 90	2,7	4
	Z2 EX 700	66086	700 VA						2,7	4
	Z2 EX 1000	66087	1000 VA						3	4
Z3 ZenBox EX : Tower UPS - High Frequency Technology										
	Z3 ZenBox EX 500	66074	500 VA	6 FR/SCHUKO outlets (3 backup + 3 surge-protected) RJ45 (In/Out) 2 visual indicators	USB Software (free download)	Unlimited	3 years	230 x 200 x 92.5	2,5	6
	Z3 ZenBox EX 700	66075	700 VA	8 FR/SCHUKO outlets (4 backup + 4 surge-protected) RJ45 (In/Out)					3,1	6
	Z3 ZenBox EX 1000	66076	1000 VA	2 visual indicators					3,4	6



SINGLE-PHASE INPUT / SINGLE-PHASE OUTPUT UPS

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATION : DIGITAL ENTERTAINMENT & IT, SMB

Serie	Model	SKU	Power	Features	Communication	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
Zen Live : Tower UPS - Line Interactive Technology with voltage regulation system										
	Zen Live 500	66081	500 VA	4 FR/SCHUKO backup outlets 1 visual indicator		120 000 €	2 years	245 x 163 x 90	3,5	4
	Zen Live 650	66082	650 VA							
	Zen Live 800	66083	800 VA	4 FR/SCHUKO backup outlets 3 visual indicators		120 000 €	2 years	292 x 199 x 91	5,6	4
	Zen Live 1000	66084	1000 VA							
Zen-X : Tower UPS - Line Interactive Technology with voltage regulation system										
	Zen-X 600	66070	600 VA	6 FR/SCHUKO outlets (3 backup + 3 surge-protected) RJ11/45 (In/Out) LCD display	USB charger + USB port Software Upsilon 2000	120 000 €	2 years	293 x 202 x 93	4,2	4
	Zen-X 800	66071	800 VA							
	Zen-X 1000	61999	1000 VA	8 FR/SCHUKO outlets (4 backup + 4 surge-protected) RJ11/45 (In/Out) LCD display	2 USB chargers + USB port Software Upsilon 2000	120 000 €	2 years	309 x 202 x 93	5,8	4



Zen Live 500/650 VA



Zen Live 800/1000 VA





Zen-X 600/800 VA



Zen-X 1000 VA

— APPLICATION : IT, SMB

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer	
X1 IEC / EX : Tower UPS - Line Interactive Technology with voltage regulation system										
	X1 500 IEC	65923	500 VA	3 IEC backup outlets 1 IEC surge-protected outlet 1 visual indicator		2 years	300 x 101 x 142	3,7	4	
	X1 700 IEC	65924	700 VA			2 years		4,4	4	
	X1 1000 IEC	65926	1000 VA			2 years		5	4	
	X1 1250 USB IEC	65939	1250 VA	4 IEC backup outlets 2 IEC surge-protected outlets 1 visual indicator		USB Software (free download)	2 years	320 x 130 x 182	8,2	1
	X1 1600 USB IEC	65941	1600 VA	2 years		10,4	1			
	X1 2000 USB IEC	65943	2000 VA	2 years		11	1			
	X1 EX 500 FR/SCHUKO	65953	500 VA	2 FR/SCHUKO backup outlets 1 visual indicator		2 years	300 x 101 x 142	3,7	4	
	X1 EX 700 FR/SCHUKO	65954	700 VA			2 years		4,4	4	
	X1 EX 1000 FR/SCHUKO	65955	1000 VA			2 years		5	4	
	X1 EX 1250 USB FR/SCHUKO	65959	1250 VA	4 FR/SCHUKO backup outlets 1 visual indicator		USB Software (free download)	2 years	320 x 130 x 182	8,2	1
	X1 EX 1600 USB FR/SCHUKO	65960	1600 VA	2 years		10,4	1			
	X1 EX 2000 USB FR/SCHUKO	65961	2000 VA	2 years		11	1			



UNINTERRUPTIBLE POWER SUPPLY

— APPLICATION : IT, SMB

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxxwxxh (mm)	Weight (kg)	Per Outer
X1+ IEC : Tower UPS - Line Interactive Technology with voltage regulation system									
	X1+ 500 IEC	66111	500 VA	4 IEC backup outlets 1 LED (ON/OFF)	USB Software (free download)	2 years	286 x 96 x 138	3,9	4
	X1+ 700 IEC	66112	700 VA			2 years	286 x 96 x 138	3,9	4
	X1+ 1000 IEC	66113	1000 VA			2 years	286 x 96 x 138	4,8	4
	X1+ 1300 IEC	66114	1300 VA	6 IEC backup outlets 3 LED indicators 1 LED (ON/OFF) indicator		2 years	298 x 148 x 179	7,5	3
	X1+ 1600 IEC	66115	1600 VA			2 years	298 x 148 x 179	9	3
	X1+ 2200 IEC	66116	2200 VA			2 years	298 x 148 x 179	10,1	3
X1+ FR SCHUKO : Tower UPS - Line Interactive technology with voltage regulation system									
	X1+ 500 FR/SCHUKO	66105	500 VA	2 FR/SCHUKO backup outlets 1 LED (ON/OFF)	USB Software (free download)	2 years	286 x 96 x 138	3,9	4
	X1+ 700 FR/SCHUKO	66106	700 VA			2 years	286 x 96 x 138	3,9	4
	X1+ 1000 FR/SCHUKO	66107	1000 VA			2 years	286 x 96 x 138	4,8	4
	X1+ 1300 FR/SCHUKO	66108	1300 VA	4 FR/SCHUKO backup outlets 3 LED indicators + 1 LED (ON/OFF)		2 years	298 x 148 x 179	7,5	3
	X1+ 1600 FR/SCHUKO	66109	1600 VA			2 years	298 x 148 x 179	9	3
	X1+ 2200 FR/SCHUKO	66110	2200 VA			2 years	298 x 148 x 179	10,1	3
X1+ UK : Tower UPS - Line Interactive Technology with voltage regulation system									
	X1+ 500 UK	66117	500 VA	2 UK backup outlets 1 LED (ON/OFF)	USB Software (free download)	2 years	286 x 96 x 138	3,9	4
	X1+ 700 UK	66118	700 VA			2 years	286 x 96 x 138	3,9	4
	X1+ 1000 UK	66119	1000 VA			2 years	286 x 96 x 138	4,8	4
	X1+ 1300 UK	66120	1300 VA	4 UK backup outlets 3 LED indicators + 1 LED (ON/OFF)		2 years	298 x 148 x 179	7,5	3
	X1+ 1600 UK	66121	1600 VA			2 years	298 x 148 x 179	9	3
	X1+ 2200 UK	66122	2200 VA			2 years	298 x 148 x 179	10,1	3
X2 EX/IEC LCD TOUCH : Tower UPS - Line Interactive Technology with voltage regulation system									
	X2 EX LCD TOUCH 500	65998	500 VA	2 FR/SCHUKO backup outlets LCD touch screen	USB Software (free download)	2 years	300 x 101 x 142	3,7	4
	X2 EX LCD TOUCH 700	65999	700 VA			2 years		4,4	4
	X2 EX LCD TOUCH 1000	66000	1000 VA			2 years		5	4
	X2 EX LCD TOUCH 1250	66001	1250 VA	4 FR/SCHUKO backup outlets LCD touch screen		2 years	320 x 132 x 182	6,2	1
	X2 EX LCD TOUCH 1600	66002	1600 VA			2 years		10,4	1
	X2 EX LCD TOUCH 2000	66003	2000 VA			2 years		11,1	1
	X2 IEC LCD TOUCH 500	66036	500 VA	4 IEC outlets (3 backup + 1 surge-protected) LCD touch screen		2 years	300 x 101 x 142	3,7	4
	X2 IEC LCD TOUCH 700	66037	700 VA			2 years		4,4	4
	X2 IEC LCD TOUCH 1000	66038	1000 VA			2 years		5	4
	X2 IEC LCD TOUCH 1250	66039	1250 VA	6 IEC outlets (4 backup + 2 surge-protected) LCD touch screen		2 years	320 x 132 x 182	6,2	1
	X2 IEC LCD TOUCH 1600	66040	1600 VA			2 years		10,4	1
	X2 IEC LCD TOUCH 2000	66041	2000 VA			2 years		11	1



X1+ 500 VA


X1+ 1600 VA





SINGLE-PHASE INPUT / SINGLE-PHASE OUTPUT UPS

UNINTERRUPTIBLE POWER SUPPLY

APPLICATIONS : IT, SMB

Serie	Model	SKU	Power	Features	Communication	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
X3 EX LCD USB FR/SCHUKO : Tower UPS - Line Interactive Technology with voltage regulation system										
	X3 EX 500 LCD USB FR/SCHUKO	65965	500 VA	2 FR/SCHUKO backup outlets RJ11/45 (In/Out) LCD Display	USB Logiciel : InfoPower	120 000 €	3 years	287 x 100 x 142	3,95	4
	X3 EX 650 LCD USB FR/SCHUKO	65966	650 VA			120 000 €	3 years		4,25	4
	X3 EX 800 LCD USB FR/SCHUKO	65967	800 VA			120 000 €	3 years		4,9	4
	X3 EX 1000 LCD USB FR/SCHUKO	65968	1000 VA			120 000 €	3 years		5,2	4
	X3 EX 1200 LCD USB FR/SCHUKO	65969	1200 VA	4 FR/SCHUKO backup outlets RJ11/45 (In/Out) LCD Display		150 000 €	3 years	350 x 146 x 160	8	1
	X3 EX 1600 LCD USB FR/SCHUKO	65970	1600 VA			150 000 €	3 years	397 x 145 x 205	11,1	1
	X3 EX 2000 LCD USB FR/SCHUKO	65971	2000 VA			150 000 €	3 years		12,5	1
	X3 EX 3000 LCD USB FR/SCHUKO	66080	3000 VA			150 000 €	3 years	495 x 150 x 250	25	1

APPLICATIONS : IT, SMB

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer	
X4 RM plus : Rack-mountable UPS - Line Interactive Technology with voltage regulation system										
	X4 600 RM Plus	66061	600 VA	4 IEC outlets + 2 FR/SCHUKO backup outlets RJ45 (In/Out) LCD display	USB Logiciel : InfoPower	2 years	230 x 440 x 88 (2U)	6,5	1	
	X4 800 RM Plus	66062	800 VA			2 years		7,7	1	
	X4 1000 RM Plus	66063	1000 VA	8 IEC outlets + 2 FR/SCHUKO backup outlets RJ45 (In/Out) LCD display		2 years	300 x 440 x 88 (2U)	11,3	1	
	X4 2000 RM Plus	66064	2000 VA			2 years	300 x 440 x 88 (2U)	13,1	1	
	X4 3000 RM Plus	66065	3000 VA			2 years	472 x 440 x 88 (2U)	22,4	1	
Make sur to provide suitable cabinet for the depth (D) of the UPS.										
X4 RM Plus : Associated accessories										
	KIT RACK V (1U/2U)	61429	-	Fixing reinforcement in a patch cabinet Recommended for UPS ≤ 3000 VA		2 years	78.5 x 3.5 x 4.5	1,4	1	



Kit rack V (1U/2U)

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CORPORATE NETWORKS, TERTIARY SECTOR

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer			
E2 LCD : Tower UPS - On Line Performance Technology												
	E2 LCD 600	FR/SCHUKO input	65348	600 VA	4 IEC backup outlets RJ11/45 (In/Out) LCD display	USB Port Software : InfoPower	330 x 100 x 145	5,2	4			
		UK input	67018									
	E2 LCD 800	FR/SCHUKO input	65349	800 VA								
		UK input	67019									
	E2 LCD 1000		65350	1000 VA								
	E2 LCD 1500		65351	1500 VA				6 IEC backup outlets RJ11/45 (In/Out) LCD display	USB & RS 232 Ports Software : InfoPower Optional : External SNMP I Pro Agent RS 232	397 x 146 x 205	3 years	11,6
E2 LCD 2000		65352	2000 VA	3 years	12,3	1						
E3 Live : UPS (Tower and/or Rack) - On Line Performance Technology												
	E3 Live 500 RM	FR/SCHUKO input	66088	500 VA	4 IEC backup outlets 10A	USB & RS 232 Ports EPO Slot Optional : SNMP & Dry Contact Card Software : InfoPower	230 x 433 x 44 (1U)	7,6	1			
		UK input	66094									
	E3 Live 750 RM	FR/SCHUKO input	66089	750 VA								
		UK input	66095									
	E3 Live 1000 RM	FR/SCHUKO input	66090	1000 VA								
		UK input	66096									
	E3 Live 1500 RM	FR/SCHUKO input	66091	1500 VA								
		UK input	66097									
	E3 Live 2200 RT	FR/SCHUKO input	66092	2200 VA				4 IEC backup outlets 10A RJ45 (In/Out) LCD display	3 years	430 x 438 x 88 (2U)	16,7	1
		UK input	66098									
E3 Live 3000 RT	FR/SCHUKO input	66093	3000 VA	8 IEC backup outlets 10A +1 IEC backup outlet 16A RJ45 (In/Out) LCD display	3 years		21,8	1				
	UK input	66099										
E3 Performance : UPS (Tower/Rack) - On Line Performance Technology												
	E3 Performance 800 RT	FR/SCHUKO input	67023	800 VA	8 IEC backup outlets 10A (4 standard + 4 programmable) RJ11/45 (In/Out) LCD display External battery connector	USB & RS 232 Ports EPO Slot Software : InfoPower Optional : SNMP & Dry Contact Card	425 x 438 x 88 (2U)	12,9	1			
		UK input	67029									
	E3 Performance 1100 RT	FR/SCHUKO input	67024	1100 VA								
		UK input	67030									
	E3 Performance 1500 RT	FR/SCHUKO input	67025	1500 VA								
		UK input	67031									
	E3 Performance 2000 RT	FR/SCHUKO input	67026	2000 VA								
		UK input	67032									
	E3 Performance 2500 RT	FR/SCHUKO input	67027	2500 VA			8 IEC backup outlets 10A (4 standard + 4 programmable) +1 IEC backup outlet 16A RJ11/45 (In/Out) LCD display External battery connector	3 years	645 x 438 x 88 (2U)	26	1	
		UK input	67033									
E3 Performance 3000 RT	FR/SCHUKO input	67028	3000 VA									
	UK input	67034										
E3 Performance 5000 RT		67035	5000 VA	6 IEC backup outlets 10A (3 standard + 3 programmable) +1 IEC backup outlet 16A RJ11/45 (In/Out) LCD display External battery connector Output terminal block	3 years	645 x 438 x 88 (2U)	39,8	1				
Make sur to provide suitable cabinet for the depth (D) of the UPS.												
E3 Performance : Backup modules - Extended autonomy up to 30 minutes and more depending on the connected load.												
	BM E3 Perf 0,8k AB24 R		67401	-	Compatible with E3 Performance 800k	Connecteur 24 Vdc	2 years	515 x 440 x 88 (2U)	19,1	1		
	BM E3P E7 1k AC24 R		67402	-	Compatible with E3 Performance 1.1k	Connecteur 24 Vdc	2 years		20,6	1		
	BM E3 Perf 1,5k CB48 R		67405	-	Compatible with E3 Performance 1.5k	Connecteur 48 Vdc	2 years		30	1		
	BM E3P E7 2k CC48 R		67406	-	Compatible with E3 Performance 2k	Connecteur 48 Vdc	2 years		38,8	1		
	BM E3 Perf 2,5k DB72 R		67408	-	Compatible with E3 Performance 2.5k	Connecteur 72 Vdc	2 years		43,3	1		
	BM E3P E7 3k DC72 R		67409	-	Compatible with E3 Performance 3k /5k	Connecteur 72 Vdc	2 years					
Make sur to provide suitable cabinet for the depth (D) of the backup module.												



UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CORPORATE NETWORKS, SENSITIVE APPLICATIONS

SINGLE-PHASE INPUT / SINGLE-PHASE OUTPUT UPS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxxwxh (mm)	Weight (kg)	Per Outer	
E3 Pro : UPS (Tower/Rack) - On Line Double Conversion Technology										
E3 Pro	E3 Pro 1000 RM (1U)	FR/SCHUKO input	67314	1000 VA	3 IEC backup outlets 10A : 1 standard outlet + 2 programmable outlets LED	USB & RS 232 Ports Software : InfoPower Optional : SNMP & Dry Contact Card	477 x 438 x 44 (1U)	12.7	1	
		UK input	67318							
	E3 Pro 1000 RT	FR/SCHUKO input	67308	1000 VA	3 IEC outlets Smart and adjustable charger up to 3.5A External battery connector LCD display		3 years	310 x 438 x 88 (2U)	12.7	1
		UK input	67315							
	E3 Pro 2000 RT	FR/SCHUKO input	67309	2000 VA	4 IEC outlets Smart and adjustable charger up to 3.5A External battery connector LCD display		3 years	410 x 438 x 88 (2U)	19	1
		UK input	67316							
	E3 Pro 3000 RT	FR/SCHUKO input	67310	3000 VA	4 IEC outlets + output terminal block Smart and adjustable charger up to 3.5A External battery connector LCD display		3 years	630 x 438 x 88 (2U)	29,3	1
		UK input	67317							
	E3 Pro 5000 RT		67319	5000 VA	Terminal block Smart and adjustable charger up to 6A External battery connector LCD display		2 years	530 x 438 x 88 (2U) + 740 x 438 x 88 (2U)*	15+55*	1
	<i>*Delivered with its external backup module (67187)</i>									
E3 Pro 6000 RT		67320	6000 VA	Terminal block Smart and adjustable charger up to 6A External battery connector LCD display	2 years	530 x 438 x 88 (2U) + 740 x 438 x 88 (2U)*	15+47*	1		
<i>*Delivered with its external backup module (67187)</i>										
E3 Pro 10k RT		67321	10 kVA	Terminal block Smart and adjustable charger up to 6A External battery connector LCD display	2 years	605 x 438 x 133 (3U) + 630 x 438 x 133 (3U)*	18+63*	1		
<i>*Delivered with its external backup module (67189)</i>										
* Battery cabinet										
Make sur to provide suitable cabinet for the depth (D) of the UPS and backup module.										
E3 Pro : Autonomy modules - Extended autonomy up to 30 minutes and more depending on the connected load.										
B	BM E3P E7 1k AC24 R	67402	-	Compatible with E3 Pro 1k RT	24 Vdc Connector	2 years	515 x 440 x 88 (2U)	20,6	1	
	BM E3P E7 1k CC24 R	67403	-	Compatible with E3 Pro 1k RT	24 Vdc Connector	2 years		30	1	
	BM E3P E7 2k CC48 R	67406	-	Compatible with E3 Pro 2k RT	48 Vdc Connector	2 years		30	1	
	BM E3P E7 3k DC72 R	67409	-	Compatible with E3 Pro 3k RT	72 Vdc Connector	2 years	635 x 440 x 88 (2U)	43,3	1	
	BM E3Pro E7 5-6k EC192 R	67187	-	Compatible with E3 Pro 5/6k RT	192 Vdc Connector	2 years	740 x 438 x 88 (2U)	47	1	
	BM E3Pro E7 8-10k FC240 R	67189	-	Compatible with E3 Pro 10k RT	240 Vdc Connector	2 years	630 x 438 x 133 (3U)	63	1	
Make sur to provide suitable cabinet for the depth (D) of the backup module.										
E3 Live : Associated accessories										
A	KIT RACK E3 Live RM (1U)	61810	-	Fixing reinforcement in a patch cabinet for E3 Live RM UPS (1U)		2 years	78.5 x 3.5 x 4.5	1,45	1	
	KIT RACK C (2U)	61811	-	Fixing reinforcement in a patch cabinet for E3 Live RT UPS (2U)		2 years	78.5 x 3.5 x 4.5	1,45	1	
	SNMP II Pro Agent E3 Live	61812	-	SNMP Agent card for E3 Live UPS		2 years	-	-	1	
	Dry Contact Card AS400 9PIN E3 Live	61809	-	AS400 Dry Contact Card		2 years	-	-	1	
E3 Performance / Pro : Associated accessories										
A	KIT RACK V (1U/2U)	61429	-	Fixing reinforcement in a patch cabinet Recommended for UPS ≤ 3000 VA		2 years	78.5 x 3.5 x 4.5	1,45	1	
	KIT RACK C (2U)	61811	-	Fixing reinforcement in a patch cabinet Recommended for UPS > 3000 VA		2 years	78.5 x 3.5 x 4.5	1,45	1	
	SNMP I Pro Agent	61156	-	SNMP Agent card for UPS equipped with a SNMP slot		2 years	-	-	1	
	External SNMP I Pro Agent RS 232	61830	-	SNMP Agent for all products equipped with a RS 232 port		2 years	-	-	1	
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license		2 years	-	-	1	
	RCCMD license for virtual server management	61143	-	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)		2 years	-	-	1	
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent		2 years	-	-	1	
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent		2 years	-	-	1	
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent		2 years	-	-	1	
	Dry Contact Card AS400 9PIN	61454	-	AS400 Embeddable Dry Contact Card		2 years	-	-	1	
	Modbus Card	61439	-	Embeddable card - Modbus RTU Protocol		2 years	-	-	1	
	BME 1 IEC RM	61442	1 to 3 kVA	19" External bypass-PDU RM for E3 Perf / Pro from 1 to 3kVA with IEC outlets		2 years	88 x 440 x 60	1,5	1	
	BME 1 FR RM	61443	1 to 3 kVA	19" External bypass-PDU RM for E3 Perf / Pro from 1 to 3kVA with FR outlets		2 years	88 x 440 x 60	1,5	1	



UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CORPORATE NETWORKS, TERTIARY SECTOR

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
E4 VALUE : Tower UPS - On Line Double Conversion High Frequency Technology									
E4 Value	E4 VALUE 1000	67417	1000 VA	3 IEC Backup outlets LED Display	RS 232 Port InfoPower Software Optional : External SNMP Agent	2 years	220 x 145 x 282	8,6	1
	E4 VALUE 1500	67425	1500 VA	4 IEC Backup outlets LED Display		2 years	235 x 145 x 397	16,1	1
	E4 VALUE 2000	67418	2000 VA			2 years	235 x 145 x 397	16,1	1
	E4 VALUE 3000	67419	3000 VA	4 IEC Backup outlets + output terminal block LED Display		2 years	335 x 190 x 421	25,2	1
	E4 VALUE 4000	67426	4000 VA	Input/output terminals LCD display	2 years	388 x 190 x 573	46	1	
	E4 VALUE 5000	67420	5000 VA		2 years	369 x 190 x 573	60	1	
E4 Value +	E4 VALUE + 6000	67656	6000 VA	Input/output terminals LCD display Manual Bypass Maintenance	USB & RS 232 Ports Software : InfoPower Optional : SNMP card	2 years	369 x 190 x 688	60	1
	E4 VALUE + 10K	67657	10 kVA			2 years	460 x 190 x 688	75	1

— APPLICATIONS : NETWORKS AND SENSITIVE APPLICATIONS, INDUSTRIAL SECTORS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer	
E4 Pro One : Tower UPS - On Line Double Conversion High Frequency Technology										
E4 Pro ONE	E4 Pro One 1000	67689	1000 VA	4 backup outlets : 1 FR/Schuko outlets (programmable) and 3 IEC outlets High power factor (1) (1 programmable) LC display	USB & RS 232 Ports InfoPower Optional : SNMP, Modbus card, Dry Contact Card	2 years	282 x 145 x 220	9,8	1	
	E4 Pro One 1500	67690	1500 VA			2 years	397 x 145 x 220	13,8	1	
	E4 Pro One 2000	67691	2000 VA	3 backup outlets : 1 FR/Schuko outlet (1 programmable) and 2 IEC outlets (1 programmable) High power factor (1) LCD display External battery connector		2 years	397 x 145 x 220	17	1	
	E4 Pro One 3000	67692	3000 VA	4 backup outlets : 2 FR/Schuko outlet (1 programmable) and 2 IEC outlets (1 programmable) High power factor (1) LCD display External battery connector		2 years	421 x 190 x 688	26,2	1	
	E4 Pro One 5000	67629	5000 VA	Input/output terminals High power factor (1) External battery connector LCD Display		2 years	369 x 190 x 688	60	1	
	E4 Pro One 6000	67630	6000 VA			2 years	369 x 190 x 688	60	1	
	E4 Pro One 8000	67631	8000 VA			High power factor (1) Manual Bypass Maintenance Parallel Configuration (optional)	2 years	442 x 190 x 688	75	1
	E4 Pro One 10k	67632	10k VA			2 years	442 x 190 x 688	75	1	



SINGLE-PHASE INPUT / SINGLE-PHASE OUTPUT UPS

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CORPORATE NETWORKS, SENSITIVE EQUIPMENTS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
E4 Pro One : Backup modules - Extended autonomy up to 25 minutes and more depending on the connected load									
B	BM E4 Pro One 2k CC48 T	67279	-	Compatible with E4 Pro et E4 Pro One 2k	48 Vdc Connector	2 years	397 x 145 x 220	27	1
	BM E4 Pro One 3k DC72 T	67281	-	Compatible with E4 Pro et E4 Pro One 3k	72 Vdc Connector	2 years	421 x 190 x 318	42	1
	BM E4 Pro One 5-6k GC192 T	67283	-	Compatible with E4 Pro 5/6k	192 Vdc Connector	2 years	442 x 190 x 688	95	1
	BM E4 Pro One &TM 8-10k HC240 T	67284	-	Compatible with E4 Pro 8/10k	240 Vdc Connector	2 years		115	1
E4 Value / E4 Pro One : Associated accessories									
A	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot	-	2 years	-	-	1
	External SNMP I Pro Agent RS 232 (Network Management)	61830	-	SNMP Agent for all products equipped with a RS 232 port	-	2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license	-	2 years	-	-	1
	RCCMD license for virtual server management	61143	-	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)	-	2 years	-	-	1
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent	-	2 years	-	-	1
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Dry Contact Card AS400 9PIN	61454	-	AS400 Embeddable Dry Contact Card	-	2 years	-	-	1
	Modbus Card	61439	-	Embeddable card - Modbus RTU Protocol	-	2 years	-	-	1
	BME 1 IEC	61440	1 to 3 kVA	External bypass Tower-PDU for E4 Pro from 1 to 3kVA with IEC outlets	-	2 years	180 x 160 x 60	1,3	1
	BME 1 FR	61441	1 to 3 kVA	External bypass Tower-PDU for E4 Pro from 1 to 3kVA with FR outlets	-	2 years	180 x 200 x 60	1,3	1
	Parallel Configuration Kit E4 Pro One	67910	-	Cable kit for a parallel configuration to be installed before delivery	-	2 years	-	-	1

— APPLICATIONS : CORPORATE NETWORKS, TERTIARY SECTOR AND SENSITIVE EQUIPMENTS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer			
E7 One RT : 19" Versatile (Tower/Rack) Paralleling Capability and Redundant UPS - On Line Double Conversion High Frequency Technology												
E7 ONE RT	E7 One 1000 RT	FR/SCHUKO input	67333	1000 VA	High power factor (1) Powerful built-in battery charger Programmable sockets External battery connector LCD display	USB, RS 232 & EPO Software : InfoPower Optional : SNMP card, Dry Contact Card, Modbus card	410 x 438 x 88 (2U)	11,6	1			
		UK input	67339									
	E7 One 1500 RT	FR/SCHUKO input	67334	1500 VA			2 years	410 x 438 x 88 (2U)	15,5	1		
		UK input	67340									
	E7 One 2000 RT	FR/SCHUKO input	67335	2000 VA			2 years	510 x 438 x 88 (2U)	19,5	1		
		UK input	67341									
	E7 One 3000 RT	FR/SCHUKO input	67336	3000 VA			2 years	630 x 438 x 88 (2U)	27,5	1		
		UK input	67342									
	E7 One 5000 RT		67346	5000 VA			2 years	610 x 438 x 88 (2U) + 740 x 438 x 88 (2U)*	17 + 47 *	1		
	<i>*Delivered with its external autonomy module (67187)</i>											
	E7 One 6000 RT		67337	6000 VA			2 years	610 x 438 x 88 (2U) + 740 x 438 x 88 (2U)*	17 + 47 *	1		
	<i>*Delivered with its external autonomy module (67187)</i>											
	E7 One 8000 RT		67347	8 000 VA			2 years	610 x 438 x 88 (2U) + 630 x 438 x 133 (3U)*	20 + 63*	1		
	<i>*Delivered with its external autonomy module (67189)</i>											
E7 One 10k RT		67338	10 000 VA	2 years	610 x 438 x 88 (2U) + 630 x 438 x 133 (3U)*	20 + 63*	1					
<i>*Delivered with its external autonomy module (67189)</i>												
* Battery cabinet												
Provide a suitable cabinet for the depth (D) of the UPS and autonomy module.												

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CORPORATE NETWORKS, TERTIARY SECTOR AND SENSITIVE APPLICATIONS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
E7 One RT : Additional backup modules									
B	BM E3P E7 1k AC24 R	67402	-	Compatible with E7 One 1000 RT	24 Vdc connector	2 years	515 x 440 x 88 (2U)	20,6	1
	BM E3P E7 1k CC24 R	67403	-	Compatible with E7 One 1000 RT		2 years		30	1
	BM E3P E7 2k CC48 R	67406	-	Compatible with E7 One 2000 RT	48 Vdc connector	2 years		30	1
	BM E3P E7 3k DC72 R	67409	-	Compatible with E7 One 3000 RT	72 Vdc connector	2 years	635 x 440 x 88 (2U)	43,3	1
	BM E3Pro E7 5-6k EC192 R	67187	-	Compatible with E7 One 5000, 6000 RT	192 Vdc connector	2 years	740 x 438 x 88 (2U)	47	1
	BM E3Pro E7 8-10k FC240 R	67189	-	Compatible with E7 One 8000, 10k RT	240 Vdc connector	2 years	630 x 438 x 133 (3U)	63	1
<i>Make sur to provide suitable cabinet for the depth (D) of the UPS autonomy module.</i>									
E7 One RT : Associated accessories									
A	KIT RACK V (1U/2U)	61429	-	Mounting brace for patch panel Recommended for UPS ≤ 3000 VA		2 years	78.5 x 3.5 x 4.5	1,4	1
	KIT RACK C (2U)	61811	-	Reinforcement for mounting in patch panel Recommended for UPS > 3000 VA		2 years	78.5 x 3.5 x 4.5	1,4	1
	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot		2 years	-	-	1
	External SNMP I Pro Agent RS 232 (Network Management)	61830	-	SNMP Agent for all products equipped with a RS 232 port		2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license		2 years	-	-	1
	RCCMD license for virtual server management	61143	-	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)		2 years	-	-	1
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent		2 years	-	-	1
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent		2 years	-	-	1
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent		2 years	-	-	1
	Carte Contacts Secs AS400 9PIN	61454	-	AS400 Embeddable Dry Contact Card		2 years	-	-	1
	Modbus Card	61439	-	Embeddable card - Modbus RTU Protocol		2 years	-	-	1
	BME 1 IEC RM	61442	1 to 3 kVA	External By-Pass-PDU RM 19" for E3 Perf / Pro from 1 to 3KVA with IEC outlets		2 ans	88 x 440 x 60	-	1
	BME 1 FR RM	61443	1 to 3 kVA	External By-Pass-PDU RM 19" for E3 Perf / Pro from 1 to 3KVA with FR outlets		2 years	88 x 440 x 60	-	1
	BME 2 RM	61444	5 to 10 kVA	External 19" By-Pass for E7 One RT from 5 to 10kVA		2 years	165 x 440 x 88 (2U)	3	1
	Parallel Configuration Kit E7 One 5K/10K RT	67910	-	Cable kit for a parallel configuration to be installed before delivery		2 years	-	-	1



**E7
ONE RT**



UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CORPORATE NETWORKS, SENSITIVE APPLICATIONS

THREE-PHASE INPUT / SINGLE-PHASE OUTPUT UPS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
E4 LCD Pro TM - On Line Double Conversion High Frequency Technology									
	E4 LCD Pro 10k TM	67508	10 kVA	Input/output terminals External battery connector LCD Display Manual Bypass Maintenance	USB & RS 232 Ports EPO Slot Software : InfoPower Optional : SNMP card, Dry Contact Card, Modbus card	2 years	419 x 190 x 688	65.4	1
	E4 LCD Pro 15k TM	67509	15 kVA			2 years	442 x 190 x 688	76.4	1
	E4 LCD Pro 20k TM	67517	20 kVA			2 years	815 x 250 x 826	126.6	1
These UPS also exist in an extended autonomy «S» version - Consult us									
E4 LCD Pro TM : Additional backup modules									
	BM E4 Pro One & TM 8-10k HC240 T	67284	-	Compatible with E4 LCD Pro 10k TM	240 Vdc connector	2 years	442 x 190 x 688	115	1
	BM E4 LCD Pro 15k TM FC240 T	67542	-	Compatible with E4 LCD Pro 15k TM	240 Vdc connector	2 ans	442 x 190 x 688	72	1
	BM E4 LCD Pro 20k TM GC196 T	67476	-	Compatible with E4 LCD Pro 20k TM	196 Vdc connector	2 years	442 x 190 x 688	103,8	1
E4 LCD Pro TM : Associated accessories									
	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot	-	2 years	-	-	1
	External SNMP I Pro Agent RS 232 (Network Management)	61830	-	SNMP Agent for all products equipped with a RS 232 port	-	2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare etc.) + 1 RCCMD license	-	2 years	-	-	1
	RCCMD license for virtual server management	61143	-	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)	-	2 years	-	-	1
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent	-	2 years	-	-	1
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Dry Contact Card AS400 9PIN	61454	-	AS400 Embeddable Dry Contact Card	-	2 years	-	-	1
	Modbus Card	61439	-	Embeddable card - Modbus RTU Protocol	-	2 years	-	-	1
E6 LCD TM RM : 19" Rack-mountable paralleling capability and redundant UPS (three/single) - On Line Double Conversion High Frequency Technology									
	E6 LCD 20k TM RM	67324	20 kVA	Input/output terminals External battery connector LCD Display Optional : parallel configuration card	USB & RS 232 Ports EPO Slot Software : InfoPower Optional : SNMP card, Dry Contact Card, Modbus card	1 year	745 x 440 x 266 (6U) 2 x + 630 x 438 x 133 (3U)*	45 + 2 x 63*	1
						*Delivered with its external backup module (67189)			
* Battery cabinet The E6 LCD TM RM range can be configured as single/single on request Make sur to provide suitable cabinet for the depth (D) of the UPS and backup module.									
E6 LCD TM RM : Associated accessories									
	KIT RACK	61429	-	Fixing reinforcement in a patch cabinet	-	2 years	78.5 x 3.5 x 4.5	1,4	1
	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot	-	2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-ready SNMP Agent for virtual network CS141 Minislot (compatible with vmWare® etc.) + 1 RCCMD license	-	2 years	-	-	1
	Dry Contact Card AS400 9PIN	61454	-	AS400 Dry Contact Card	-	2 years	-	-	1
	BME 3 TM RM	61458	15/20kVA	19" External bypass for E6 LCD TM RM 15-20KVA	-	2 years	196 x 438 x 88 (2U)	3	1
	Parallel Configuration Kit E6 TM RM 15 and 20k	61463	-	Kit to be installed before delivery	-	2 years	-	-	1

UNINTERRUPTIBLE POWER SUPPLY


— APPLICATIONS : SENSITIVE NETWORKS AND APPLICATIONS, INDUSTRIAL SECTORS

THREE-PHASE / THREE-PHASE


Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
E4 Evolution II + TT HD : Solution for elevators equipped with regenerative drive system and motor braking system									
On Line Double Conversion High Frequency Technology									
	E4 Evolution II + 30k TT HD AN10*	67635	30k VA	Input/output terminals High power factor (1) LCD display Reinjected current absorption bank (Energy Box) Manual Bypass Maintenance Simplified maintenance per module	USB, RS 232 & EPO Logiciel infopower En option : SNMP & contacts secs, carte Modbus	1 year	815 x 300 x 1000 + 815 x 250 x 826*	60 + 208*	1
						*Delivered with its external backup module (67479)			
* AN 10 = Nominal Autonomy (10 min)									

UNINTERRUPTIBLE POWER SUPPLY


— APPLICATIONS : SENSITIVE NETWORKS AND APPLICATIONS, INDUSTRIAL SECTORS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer			
M5T : Paralleling capability and redundant UPS (three/three) - On Line Double Conversion High Frequency Technology												
	M5T 10k SB	67670	10 kVA	Input/output terminals High power factor (1) Double power supply LCD touch screen (5" or 7" depending on model) Parallel connection (up to 4 or 6 UPS with battery modules in common, depending on model) Bypass Maintenance Manual	USB, RS 232 & EPO Software : InfoPower Optional : SNMP card, Dry contact card (100 to 200 kVA models), Modbus card	1 year	627 x 250 x 826	41	1			
	M5T 10k AN10	67658	10 kVA			1 year	627 x 250 x 826	105	1			
	M5T 10k AN30*	67678	10 kVA			1 year	627 x 250 x 826	165	1			
	<i>Delivered with its internal battery kit (61808)</i>											
	M5T 15k SB	67668	15 kVA			1 year	627 x 250 x 826	45	1			
	M5T 15k AN10	67659	15 kVA			1 year	627 x 250 x 826	125	1			
	M5T 15k AN30*	67679	15 kVA			1 year	627 x 250 x 826 + 830 x 250 x 576	125+128	1			
	<i>Delivered with its external autonomy module (67733)</i>											
	M5T 20k SB	67669	20 kVA			1 year	627 x 250 x 826	45	1			
	M5T 20k AN10	67660	20 kVA			1 year	627 x 250 x 826	125	1			
	M5T 20k AN30*	67680	20 kVA			1 year	627 x 250 x 826 + 830 x 250 x 576	128+208	1			
	<i>Delivered with its external autonomy module (67733)</i>											
	M5T 30k SB	67671	30 kVA			1 year	815 x 300 x 1000	78	1			
	M5T 30k AN10	67661	30 kVA			1 year	815 x 300 x 1000	213	1			
	M5T 30k AN20*	67681	30 kVA			1 year	815 x 300 x 1000 + 815 x 250 x 826	213+208	1			
	<i>Delivered with its external autonomy module (67479)</i>											
	M5T 40k SB	67672	40 kVA			1 year	815 x 300 x 1000	80	1			
	M5T 40k AN10	67662	40 kVA			1	815 x 300 x 1000	243	1			
	M5T 40k AN20*	67682	40 kVA			1 year	815 x 300 x 1000 + 815 x 250 x 826	243+208	1			
	<i>Delivered with its external autonomy module (67481)</i>											
M5T 60k S	67663	60 kVA	1 year	815 x 300 x 1000	87**0	1						
M5T 80k S	67687	80 kVA	1 year	979 x 600 x 1600	250**0	1						
M5T 100k S	67664	100 kVA	1 year	979 x 600 x 1600	250**0	1						
M5T 120k S	67665	120 kVA	1 year	979 x 600 x 1600	250**0	1						
M5T 150k S	67688	150 kVA	1 year	979 x 600 x 1600	309**0	1						
M5T 180k S	67666	180 kVA	1 year	979 x 600 x 1600	309**0	1						
M5T 200k S	67667	200 kVA	1 year	979 x 600 x 1600	311**0	1						

The SB versions are configured for extended autonomies - Consult us.
 The S models are UPS without internal batteries but equipped with a powerful charger designed for the addition of extended autonomy modules.
 The M5T models from 10 to 20 kVA can be configured in three/single on request.
 * AN = Nominal Autonomy (for example AN20 = Nominal Autonomy 20 min)
 ** weight without batteries

M5T HD - Solution for elevators equipped with regenerative drive system and motor braking system												
On Line Double Conversion High Frequency Technology												
	M5T 20k HV AN10 HD*	67686	20k VA	Input/output terminals High power factor (1) Reinject current absorption bank (HD Energy Box) LCD display Bypass Maintenance Manual Simplified maintenance per module	USB, RS 232 & EPO Software : InfoPower Optional : SNMP card, Dry contact card (M5T HD 60k S), Modbus card	1 year	627 x 250 x 826 + 980 x 580 x 285	125 + 21	1			
	<i>Delivered with the external accessory M5T HD Box (61820)</i>											
	M5T 30k HV AN10 HD*	67683	30k VA			1 year	815 x 300 x 1000 + 980 x 580 x 285	213 + 21	1			
	<i>Delivered with the external accessory M5T HD Box (61820)</i>											
	M5T 40k HV AN10 HD*	67684	40k VA			1 year	815 x 300 x 1000 + 980 x 580 x 285	243 + 21	1			
<i>Delivered with the external accessory M5T HD Box (61820)</i>												
M5T 60k S HV HD	67685	60k VA	1 year	815 x 300 x 1000 + 980 x 580 x 285	87** + 21	1						
<i>Delivered with the external accessory M5T HD Box (61820)</i>												

* AN10 = Nominal Autonomy (10 min)
 ** weight without batteries

M5T : Associated accessories									
	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot	-	2 years	-	-	1
	External SNMP I Pro Agent RS 232 (Network Management)	61830	-	Agent SNMP pour tous les produits équipés d'un port RS 232	-	2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license	-	2 years	-	-	1
	RCCMD license for virtual server management	61143	-	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)	-	2 years	-	-	1
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent	-	2 years	-	-	1
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Dry Contact Card AS400 9PIN	61454	-	AS400 Embeddable Dry Contact Card	-	2 years	-	-	1
	Modbus Card	61439	-	Embeddable card - Modbus RTU Protocol	-	2 years	-	-	1
	Parallel connection cable M5T 10/15/20 kVA	67909	-	Parallel cables to be installed before delivery	-	2 years	-	-	1
	M5T HD Box (for M5T 20/30/40/60 kVA models)	61820	-	External accessory consisting of an integrated resistance bench	-	1 year	980 x 580 x 285	125 + 21	1

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : SENSITIVE NETWORKS AND APPLICATIONS, INDUSTRIAL SECTORS

THREE-PHASE INPUT / SINGLE OR THREE-PHASE OUTPUT UPS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
M6Ti : Parallelizable and Redundant UPS (Three-Phase/Three-Phase) - Technologie On Line Double Conversion									
M6Ti	M6Ti 60k	69309	60 kVA	Input/output terminal block High power factor (1) Modular design Power walk-in function 7" LCD touchscreen Dual input Parallelisable up to 4 UPS (depending on model) Extended autonomy possible	USB, RS 232, EPO, SNMP & dry contacts InfoPower software Options: SNMP agents, dry contacts card	1 year	1000 x 320 x 800	88	1
	M6Ti 100k	69301	100 kVA			1 year	1000 x 430 x 1200	200	1
	M6Ti 120k	69302	120 kVA			1 year	1000 x 430 x 1200	200	1
	M6Ti 180k	69303	180 kVA			1 year	1000 x 600 x 1200	265	1
	M6Ti 200k	69304	200 kVA			1 year	1000 x 600 x 1200	265	1
M6Ti TX : Parallellizable and Redundant (three-phase/three-phase) UPS with Isolation Transformer - On Line Double Conversion Technology									
M6Ti TX	M6Ti TX 60k	69310	60 kVA	Input/output terminal block Isolation transformer High power factor (1) Modular design Power walk-in function 7" LCD touch screen Dual Input Parallelisation of up to 4 UPS (depending on model) Extended autonomy possible	USB, RS 232, EPO, SNMP & dry contacts InfoPower software Options: SNMP agents, dry contacts card	1 year	1000 x 600 x 1200	334	1
	M6Ti TX 100k	69305	100 kVA			1 year	1000 x 480 x 1600	496	1
	M6Ti TX 120k	69306	120 kVA			1 year	1000 x 480 x 1600	536	1
	M6Ti TX 180k	69307	180 kVA			1 year	1000 x 600 x 2000	805	1
	M6Ti TX 200k	69308	200 kVA			1 year	1000 x 600 x 2000	845	1
M6Ti and M6Ti TX : Associated Accessories									
A	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot	-	2 years	-	-	1
	External SNMP I Pro Agent RS 232 (Network Management)	61830	-	SNMP Agent for all products equipped with a RS 232 port	-	2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license	-	2 years	-	-	1
	RCCMD license for virtual server management	61143	-	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)	-	2 years	-	-	1
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent	-	2 years	-	-	1
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	-	2 years	-	-	1
	Dry Contact Card AS400 9PIN	61454	-	AS400 Embeddable Dry Contact Card	-	2 years	-	-	1
	Modbus Card	61439	-	Embeddable card - Modbus RTU Protocol	-	2 years	-	-	1



M5T range



M6Ti 100/120K

M6Ti 180/200K



M6Ti TX range

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATION : CRITICAL NETWORKS AND APPLICATIONS, DATA CENTERS

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxxwxh (mm)	Weight (kg)	Per Outer
Mod3 : Paralleling capability and redundant UPS (three/three, three/single, single/single) - On Line Double Conversion High Frequency Technology									
Mod3 : Modular solution for single use in 19" rack format & versatile (Tower/Rack)									
Mod3	Mod3 C 10k TT	67725	10 kVA Power modules with connection kit	Redundant modular configuration Available in 3/3, 3/1, 1/1 Hot swappable power modules Input/output terminal blocks LCD display Batteries in separate cabinets	USB Software : InfoPower Optional : SNMP card, connection kit for models without connection kit (C), control module	1 year	678 x 418 x 129 (3U)	21	1
	Mod3 10k TT	67726	10 kVA Power modules without connection kit			1 year	604 x 418 x 129 (3U)	20	1
	Mod3 C 10k TM	67727	10 kVA Power modules with connection kit			1 year	678 x 418 x 129 (3U)	20,5	1
	Mod3 10k TM	67728	10 kVA Power modules without connection kit			1 year	604 x 418 x 129 (3U)	18,5	1
Mod3 : Modular solution for use in a pre-configured Mod3 rack cabinet (19U)									
Mod3	Mod3 C 40/10 (19U) TT (max nb of installable power modules : 4* 10 kVA)	67729	10 to 40 kVA Per 10kVA power modules	Redundant modular configuration Available in 3/3, 3/1, 1/1 Hot swappable power modules Input/output terminal blocks 5,7" color LCD display Control modules	USB Software : InfoPower Optional : SNMP card, 10" LCD touch screen	1 year	875 x 443 x 840 (19U)	72*	1
	Mod3 C 40/10 (19U) TT (max nb of installable power modules : 4* 10 kVA)	67730	10 to 40 kVA Per 10kVA power modules			1 year		72*	1
* weight without batteries The 3/1 phase versions can be configured as 1/1 phase For any particular configuration and extended autonomy battery cabinets, please contact us									
Mod3 : Autonomy modules									
Power modules Mod3 for single use in 19" rack format & versatile (Tower/Rack)									
B	BM Mod3C EC192 R	67583	-	192V*/9Ah Autonomy module	1 year	678 x 418 x 129 (3U)	51	1	
	BM Mod3C FC240 R	67584	-	240V*/9Ah Autonomy module	1 year	678 x 418 x 129 (3U)	61	1	
	BM Mod3C GA384 R	67585	-	384V*/5Ah Autonomy module	1 year	678 x 418 x 129 (3U)	68,6	1	
Mod3 Power module for use in a pre-configured Mod3 rack cabinet (19U)									
B	BM Mod3 EC192 R	67586	-	192V*/9Ah Autonomy module	1 year	604 x 418 x 129 (3U)	49	1	
	BM Mod3 FC240 R	67587	-	240V*/9Ah Autonomy module	1 year	604 x 418 x 129 (3U)	59	1	
	BM Mod3 GA384 R	67588	-	384V*/5Ah Autonomy module	1 year	604 x 418 x 129 (3U)	41	1	
Provide a suitable cabinet for the depth (D) of the autonomy module. * The 192V and 240V autonomy modules are to be used in pairs									
Mod3 : Associated accessories									
A	SNMP I Pro Agent (Network Management)	61156		SNMP Agent card for UPS equipped with a SNMP slot	2 years	-	-	1	
	External SNMP I Pro Agent RS 232 (Network Management)	61830		SNMP Agent for all products equipped with a RS 232 port	2 years	-	-	1	
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848		vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license	2 years	-	-	1	
	RCCMD license for virtual server management	61143		1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)	2 years	-	-	1	
	Temperature & Humidity Probe - EMD	61452		Temperature and humidity detector to be connected to the SNMP I Pro agent	2 years	-	-	1	
	Temperature Probe CS141 MINI	61822		Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	2 years	-	-	1	
	Temperature & Humidity Probe CS141 MINI	61839		Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	2 years	-	-	1	
	Mod3 19U-Cabinet TT	67827		19U preconfigured Mod3 rack cabinet (3/3 version) - Connection kit included	2 years	857 x 443 x 840	72	1	
	Mod3 19U-Cabinet TM	67828		19U preconfigured Mod3 rack cabinet (3/1 version) - Connection kit included	2 years	857 x 443 x 840	72	1	
	Mod3 Control module	67835		Module with integrated dry contacts, EPO, RS232, USB and two additional slots for the SNMP cards, Modbus, AS400 (standard for pre-configured Mod3 rack solutions)	2 years	-	-	1	
	Connection kit (UPS module)	67830		Kit for connecting the UPS in single use	2 years	275 x 434,5 x 42	3,7	1	
	Connection kit (autonomy module)	67831		Kit for connecting the autonomy module in single use	2 years	275 x 434,5 x 42	3,7	1	
	10" Touch screen	67834		10" color touch screen for Mod3	2 years	-	-	1	
	Module front panel	67832		Faceplate for masking an empty bay when a module is missing	2 years	-	-	1	

Mod3



Mod3 C 10kVA




Mod3 C 40/10 (19U)

THREE-PHASE INPUT / SINGLE-PHASE OR THREE-PHASE OUTPUT UPS

UNINTERRUPTIBLE POWER SUPPLY

— APPLICATIONS : CRITICAL NETWORKS AND APPLICATIONS, DATA CENTERS

THREE-PHASE INPUT / THREE-PHASE OUTPUT UPS



Many other configurations are possible: consult a sales representative or our web support

ModSTE

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
ModST E / ModST : Modular, paralleling capability and redundant UPS (three/three) - On Line Double Conversion High Frequency Technology									
B	ModST E 60/20 S (15U) (max nb of installable power modules: 3*20 kVA)	67710	20 to 60 kVA Per power modules of 20 kVA	Modular configuration N + X Hot swappable power modules Input/output terminal blocks 5,7" LCD screen Manual maintenance bypass Separate UPS power supply and manual bypass Batteries in separate cabinets	Additional Com Port : 2 contacts for SNMP 20 dry contacts Optional : 10" touch screen SNMP card	1 year	1100 x 515 x 761 (15U)	176	1
	ModST E 90/30 S (15U) (max nb of installable power modules: 3*30 kVA)	67711	30 to 90 kVA Per power modules of 30 kVA			1 year		180,5	1
	ModST E 60/20 (29U) (max nb of installable power modules: 3*20 kVA)	67708	20 to 60 kVA Per power modules of 20 kVA			1 year	1100 x 515 x 1522 (29U)	301	1
	ModST E 90/30 (29U) (max nb of installable power modules: 3*30 kVA)	67709	30 to 90 kVA Per power modules of 30 kVA	1 year		305,5		1	
	ModST 80/20 S (30U) (max nb of installable power modules: 4*20 kVA)	67703	20 to 80 kVA Per power modules of 20 kVA	Modular configuration N + X Separate network 1/network 2 power supply Hot swappable power modules Input/output terminal blocks 5,7" LCD screen Manual maintenance bypass Integrated batteries		1 year	1100 x 600 x 1475 (30U)	363	1
	ModST 120/20 S (30U) (max nb of installable power modules: 6*20 kVA)	67704	20 to 120 kVA Per power modules of 20 kVA			1 year	1100 x 600 x 1475 (30U)	390	1
	ModST 120/30 S (30U) (max nb of installable power modules: 4*30 kVA)	67705	30 to 120 kVA Per power modules of 30 kVA			1 year	1100 x 600 x 1475 (30U)	335	1
	ModST 180/30 S (30U) (max nb of installable power modules: 6*30 kVA)	67706	30 to 180 kVA Per power modules of 30 kVA	Modular configuration N + X Separate network 1/network 2 power supply Hot swappable power modules Input/output terminal blocks Input: Three-phase / Output : Three-phase 5,7" LCD screen Manual maintenance bypass Additional autonomy modules		1 year	1100 x 600 x 1475 (30U)	437,5	1
	ModST 210/30 S (42U) (max nb of installable power modules: (7+1)*30 kVA)	67707	30 to 210 kVA Per power modules of 30 kVA			1 year	1100 x 600 x 2010 (42U)	549	1
	ModST 300/30 S (42U) (max nb of installable power modules: 10*30 kVA)	67724	30 to 300 kVA Per power modules of 30 kVA			1 year	1100 x 600 x 2010	620	1
	ModST 90/30 (30U) (max nb of installable power modules: 3*30 kVA)	67701	30 to 90 kVA Per power modules of 30 kVA	Modular configuration N + X Separate network 1/network 2 power supply Hot swappable power modules Input/output terminal blocks 5,7" LCD screen Manual maintenance bypass Integrated batteries		1 year	1100 x 600 x 1475 (30U)	405	1
	ModST 120/30 (42U) (max nb of installable power modules: 4*30 kVA)	67702	30 to 120 kVA Per power modules of 30 kVA			1 year	1100 x 600 x 2010 (42U)	482	1
	ModST 120/60 (30U) (max nb of installable power modules: 2*60 kVA)	67736	60 to 120 kVA Per power modules of 60 kVA			1 year	600 x 1100 x 1475 (30U)	308	1
	ModST 180/60 (30U) (max nb of installable power modules: 3*60 kVA)	67737	60 to 180 kVA Per power modules of 60 kVA	Modular configuration N + X Separate network 1/network 2 power supply Hot swappable power modules Input/output terminal blocks Input: Three-phase / Output : Three-phase 10" LCD screen Manual maintenance bypass Additional autonomy modules		1 year	600 x 1100 x 1475 (30U)	352	1
	ModST 240/60 (42U) (max nb of installable power modules: 4*60 kVA)	67738	60 to 240 kVA Per power modules of 60 kVA			1 year	600 x 1100 x 2010 (42U)	466	1
	ModST 300/60 (42U) (max nb of installable power modules: 5*60 kVA)	67739	60 to 300 kVA Per power modules of 60 kVA			1 year	600 x 1100 x 2010 (42U)	510	1
	ModST 420/60 (42U) (max nb of installable power modules: 7*60 kVA)	67740	60 to 420 kVA Per power modules of 60 kVA	Modular configuration N + X Separate network 1/network 2 power supply Hot swappable power modules Input/output terminal blocks Input: Three-phase / Output : Three-phase 10" LCD screen Manual maintenance bypass Additional autonomy modules		1 year	1200 x 1100 x 2010 (42U)	888	1
	ModST 500/60 (42U) (max nb of installable power modules: 8*60 kVA)	67741	60 to 480 kVA Per power modules of 60 kVA			1 year	1200 x 1100 x 2010 (42U)	932	1
ModST 600/60 (42U) (max nb of installable power modules: 10*60 kVA)	67742	60 to 600 kVA Per power modules of 60 kVA	1 year		1200 x 1100 x 2010 (42U)	1020	1		
For any particular configuration and extended autonomy battery cabinets, please contact us									
ModST / ModST E : Power & autonomy modules - Autonomy extensions									
B	Power module 20 kVA	67801	20 kVA	20kVA / 20 kW Power module	1 year	132 x 440 x 650 (3U)	34	1	
	Power module 30 kVA	67802	30 kVA	30kVA / 30 kW Power module	1 year	132 x 440 x 650 (3U)	34,5	1	
	Power module 60 kVA	67836	60 kVA	60kVA / 60 kW Power module	1 year	750 x 438 x 130 (3U)	44	1	
	Battery module (ModST)	67585	-	4 drawers make up an empty battery module	1 year	155 x 107 x 735	26	1	
	BM ModST LC480 T	67712	-	Compatible with ModST 30U	2 years	1100 x 600 x 1475	905	1	
	BM ModST MC480 T	67713	-	Compatible with ModST 42U	2 years	1100 x 600 x 2010	1300	1	
	BM ModST HK480 T	67714	-	Compatible with ModST 42U	2 years	1100 x 600 x 2010	1407	1	
	BM ModSTE KC480 T	67715	-	Compatible with ModST E 15U	2 years	1000 x 515 x 761	407	1	
ModST / ModST E : Associated accessories									
A	SNMP I Pro Agent (Network Management)	61156	-	SNMP Agent card for UPS equipped with a SNMP slot	2 years	-	-	1	
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61848	-	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license	2 years	-	-	1	
	Temperature & Humidity Probe - EMD	61452	-	Temperature and humidity detector to be connected to the SNMP I Pro agent	2 years	-	-	1	
	Temperature Probe CS141 MINI	61822	-	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	2 years	-	-	1	
	Temperature & Humidity Probe CS141 MINI	61839	-	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	2 years	-	-	1	
	10" Touch screen	67817	-	10" color touch screen for ModST	2 years	-	-	1	
	Communication card	67816	-	Additional programmable communication card for ModST	2 years	-	-	1	



UPS SYSTEMS

—⦿ APPLICATION : EXTENDED AUTONOMIES OTHER THAN COMPUTING

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
G1 / G1 Solar MPPT : UPS for extended autonomies - High Frequency Technology									
	G1 5KW	63228	5000 VA	DC/AC inverter 60A battery charger Up to 9 units in parallel (5 kW per unit) 19" rack format LCD display MPPT technology (G1 Solar MPPT)	RS232 / RS485 SNMP Option	2 years	400 x 438 x 88 (2U)	9.1	8
	G1 SOLAR MPPT 5Kw	63229	5000 VA						8
G1 / G1 Solar MPPT : Associated Accessory									
	G1 SNMP Agent (Network Management)	61199	Embeddable SNMP agent card for G1 and G1 Solar MPPT			2 years	-	-	1



SERVICES

—⦿ ADDITIONAL AND OPTIONAL SERVICES

INSURANCE

Infosec Communication offers free of charge insurance for connected equipment on most UPS, surge protectors and and energy savers

PRODUCT
100 %
WARRANTED

For any particular configuration, please contact us

Tel : +33 (0)2 40 76 11 77
Fax : +33 (0)2 40 96 29 51
commercial@infosec.fr

Sales department

OTHER ACCESSORIES & EQUIPMENT

Serie	Model	SKU	Features	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
ADDITIONAL ACCESSORIES FOR UPS							
A	RJ11/RJ11 cable	61431	RJ11 cable	-	-	-	1
	IEC MF C13/C14_10A cable	61401	IEC M/F 10A cord	-	-	-	1
	IEC 16A MF C19/C20 cable	61456	IEC M/F 16A cord	-	-	-	1
	10A FR-SCHUKO/IEC C13 power cable	61432	10A power cord for IEC power supply	-	-	-	1
	IEC-C14 / 3 FR outlets adaptor	61402	IEC cord + 3 FR (2P+T) outlets	-	-	-	1
	ATS Automatic Transfer Switch 1/3k	61453	16A Power transfer system	2 years	330 x 483 x 44	5	1
	Isolation transformer	-	Available in different powers and for different products - consult us	-	-	-	1
	Smart Charger S - 24 VDC	61139	External charger for 24V battery module - 2 to 6A	2 years	83 x 150 x 220	2	1
	Smart Charger S - 48 VDC	61140	External charger for 48V battery module - 2 to 6A	2 years		2	1
	Smart Charger S - 72 VDC	61141	External charger for 72V battery module - 2 to 6A 2 years	2 years		2,5	1
COMMUNICATION SOLUTIONS FOR NETWORKED UPS AND VIRTUAL ENVIRONMENTS (VMWARE®, Hyper VTM, etc.)							
A	SNMP I Pro Agent (Network Management)	61156	SNMP Agent card for UPS equipped with a SNMP slot	2 years	-	-	1
	External SNMP agent USB (Network management)	61823	DY 630 USB SNMP Agent for all products equipped with a USB port	2 years	-	-	1
	External SNMP I Pro Agent RS 232 (Network Management)	61830	SNMP Agent for all products equipped with a RS 232 port	2 years	-	-	1
	SNMP VM CS141 Mini-6 agent (Virtual Environment Network Management)	61148	vmWare®-Ready SNMP Agent for virtual network CS141 Mini-6 (compatible with vmWare® etc.) + 1 RCCMD license	2 years	-	-	1
	RCCMD license for virtual server management	61143	1 RCCMD Licence (1 per additional network environment) compatible with SNMP VM CS141 Mini-6 agent (ref. 61848)	2 years	-	-	1
	Temperature Probe CS141 MINI	61822	Temperature detector to be connected to the SNMP VM CS141 Mini-6 agent	2 years	-	-	1
	Temperature & Humidity Probe CS141 MINI	61839	Temperature and humidity detector to be connected to the SNMP VM CS141 Mini-6 agent	2 years	-	-	1
	Temperature & Humidity Probe - EMD	61452	Temperature and humidity detector to be connected to the SNMP I Pro agent	2 years	-	-	1

BATTERIES

Serie	Model	SKU	Features	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
Batteries - UPS spare parts							
A	BATTERY 12V - 5 Ah	61989	BAT. LHR1224W	1 year	107 x 70 x 90	1,9	1
	BATTERY 12V - 7,2 Ah	61902	BAT. GP1272F2	1 year	151 x 65 x 100	2,3	1
	BATTERY 12V - 9 Ah	61988	BAT. LHR1235W	1 year		2,5	1

RACKMOUNTABLE DISTRIBUTION STRIPS

Serie	Model	SKU	Features	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
PDU - A complete range of rackmountable distribution strips							
PDU	L4 RM	61470	1U PDU 4 FR outlets	1 year	255 x 44,4 x 44,4	0,6	1
	L6 RM	61471	1U PDU 19" 6 FR outlets	1 year	485 x 45 x 45	0,8	1
	L6 RM plus	61472	1U PDU 19" 6 FR outlets + 16A circuit breaker	1 year	485 x 46,5 x 44,4	1,2	1
	L8 RM	61473	1U PDU 19" 8 FR outlets	1 year	485 x 45 x 45	0,9	1
	L9 RM	61474	1U PDU 19" 9 FR outlets	1 year	485 x 45 x 45	0,9	1
	L8 RM C14	61475	PDU 19" 8 FR outlets + IEC C14 power cable (10A) For UPS with IEC 10A C13 output	1 year	485 x 45 x 45	0,9	1
	L9 RM C20	61476	19" PDU 9 FR outlets + IEC C20 power cable (16A) For UPS with IEC 16A C19 output	1 year	485 x 45 x 45	0,9	1
	L10 RM C14	61477	19" PDU 10 IEC outlets + IEC C14 power cable (10A) For UPS with IEC 10A C13 output	1 year	485 x 46 x 44,4	0,9	1
	L10 RM C20	61478	19" PDU 10 IEC outlets + IEC C20 power cable (16A) For UPS with IEC 16A C19 output	1 year	485 x 46 x 44,4	0,9	1
	L18 VM plus	61479	Vertical PDU 18 FR outlets + 2 circuit breakers (1 for 9 outlets) + 2m cable For connection on terminal block from 5kVA	1 year	44,4 x 44,4 x 1100	2,2	1
	L20 VM plus	61480	Vertical PDU 20 IEC outlets + 2 circuit breakers (1 for 10 outlets) + 2m cable For connection on terminal block from 5kVA	1 year	44,4 x 44,4 x 1100	2	1

PDU



L8 RM C14



SNMP I Pro



SNMP VM CS141 Mini-6



Smart Charger S



L9 RM C20



DY 630 USB SNMP Agent



Power cord



REGULATORS

— APPLICATION : VOLTAGE REGULATOR

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
R1 USB : Voltage regulator - Compatible with wide input voltage ranges									
R1 USB	R1 USB 600	63168	600 VA	Relay technology 3 FR/SCHUKO outlets USB charger 3 status indicators	-	2 years	180 x 95 x 119	1,3	8
	R1 USB 1000	63169	1000 VA					1,6	8
	R1 USB 1500	63170	1500 VA					1,9	8
R2 Pro : Voltage Regulator - Compatible with wide input voltage ranges									
R2 PRO	R2 PRO 1500	63148	1500 VA	Relay technology 2 FR/SCHUKO outlets LCD display	Control panel	1 year	150 x 140 x 200	5	4
	R2 PRO 2000	63149	2000 VA				220 x 160 x 180	5,9	4
	R2 PRO 3000	63150	3000 VA				280 x 200 x 220	7,8	2
	R2 PRO 5000	63151	5000 VA	Relay technology Terminal block LCD display			340 x 210 x 280	9,6	2
	R2 PRO 10k	63153	10 000 VA				410 x 280 x 300	16,5	1
	R2 PRO 20k	63155	20 000 VA				360 x 450 x 592	42	1

R1
USB



R2
PRO



INVERTER CHARGERS

— APPLICATION : RENEWABLE ENERGIES / SELF-PRODUCED ENERGY

Serie	Model	SKU	Power	Features	Communication	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
C2 : 2 in 1 Inverter charger									
C2	C2 Nomad combo 4000-48V	63208	4000 VA	Photovoltaic DC/AC inverter Delivers a sinusoidal current and a 230V voltage from the batteries Accepts multiple power sources: Photovoltaic panel, grid/generator IP23 protection rating LCD display	RJ45 (RS 232) Logiciel WatchPower	2 years	120 x 295 x 468	10	1
C3 : 2 in 1 Inverter charger with MPPT technology									
C3	C3 MPPT 1000-48V	63211	1000 VA	MPPT Technology Photovoltaic DC/AC inverter Delivers a sinusoidal current and a 230V voltage from the batteries Accepts multiple power sources: Photovoltaic panel, grid/generator IP23 protection rating LCD display	RJ45 (RS 232) Logiciel WatchPower	2 years	120 x 280 x 375	6,8	1
	C3 + MPPT 2000-48V	63213	2000 VA				140 x 295 x 479	11,50	1
	C3 + MPPT 4000-48V	63216	4000 VA				540 x 295 x 140	12,50	1
C2 Nomad Combo and C3 MPP : Associated accessories									
A	Paralleling kit	61712	-	Paralleling kit C3+ MPPT 4000-5000VA	-	2 years	-	-	1
	Remote control display	61713	-	C3 MPPT External control unit		2 years	198 x 162 x 88	-	1

C2



C3




OTHER ACCESSORIES & EQUIPMENT

—⊙ NOMAD ENERGY


Serie	Model	SKU	Features	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
	Travel adapter	61514	Travel adapter (European, American, Australian plug...) with built-in USB charger	2 years	82 x 50 x 28	0,08	10

SURGE PROTECTORS


—⊙ APPLICATIONS : DIGITAL ENTERTAINMENT

Serie	Model	SKU	Features	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
	S4 Black Line II	61294	4 FR outlets with surge protection	2 500 €	2 years	300 x 55 x 40	0,38	20
	S5 Black Line II	61295	5 FR outlets with surge protection	2 500 €	2 years	350 x 55 x 40	0,44	20
	S6 Black Line II	61296	6 FR outlets with surge protection	2 500 €	2 years	400 x 55 x 40	0,52	20


—⊙ APPLICATIONS : DIGITAL ENTERTAINMENT & MULTIMEDIA

Serie	Model	SKU	Features	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
	S1 USB NEO	61297	1 FR outlet with surge protection - 2 USB chargers (2.1A)	15 000 €	2 years	106 x 76 x 80	0,16	20
	S5 USB NEO	61298	5 FR outlets with surge protection - 2 USB chargers (2.1A)	50 000 €	2 years	371 x 64 x 39.5	0,52	20

—⊙ APPLICATIONS : SIMPLE ELECTRICAL EQUIPMENT

Serie	Model	SKU	Features	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
	S5	61270	5 FR outlets with surge protection 50	50 000 €	2 years	370 x 62 x 50	0,48	20
	S8	61272	8 FR outlets with surge protection	50 000 €	2 years	360 x 135 x 63	0,79	10

—⊙ APPLICATION : PERSONAL COMPUTING & MULTIMEDIA

Serie	Model	SKU	Features	Connected equipment warranty	Warranty	Dimensions dxwxh (mm)	Weight (kg)	Per Outer
	S1 LAN	61269	1 FR outlet with surge protection - RJ45 (In/Out)	15 000 €	2 years	95 x 65 x 85	0,10	20
	S5 LAN	61271	5 FR outlets with surge protection - RJ45 (In/Out)	50 000 €	2 years	370 x 62 x 50	0,48	20
	S8 LAN TV	61273	8 FR outlets with surge protection - RJ45 (In/Out) TV antenna protection (coaxial cable connectors)	50 000 €	2 years	360 x 135 x 63	0,79	10



MORE THAN 30 YEARS OF EXPERIENCE

INFOSEC Communication's 30 years of experience and its customised solution ambition have enabled it to build close client partnerships which the company is proud to maintain through the quality of its human relations.

Environment

Our environmental approach has the following permanent objectives:

- Sourcing of "green" **components** for each new product
- Selecting our suppliers for their environmental **commitments**
- Reducing the consumption of natural resources and energy
- Optimising the impact of our sales **networks** on the environment (packaging, transport)
- Dismantling, **recycling** of products and associated packaging, and recovery/re-use of all waste
- Raising the environmental awareness of our employees



Energy management solutions

INFOSEC UPS System™ solutions are designed to **effectively protect sensitive domestic and industrial IT hardware** from potentially irreversible damage caused by power disturbances, interference impacting the power supply network and power outages.

Thanks to its wide range of solutions, INFOSEC UPS SYSTEM™ meets the **needs of both private and professional users**. Unequalled **reliability and fast, personalised after-sales service** are the major assets that INFOSEC UPS SYSTEM™ applies to ensure **total customer satisfaction**.


Since its creation, INFOSEC Communication has developed a number of ranges of inverters, regulators, chargers, converters and surge protectors based on **the most effective and power efficient technologies**.

The **hardware protection systems** are thus complemented by software interfaces ensuring **total protection of sensitive equipment under all circumstances**.





L'Énergie Sans Limite !
Safe Energy for Life !

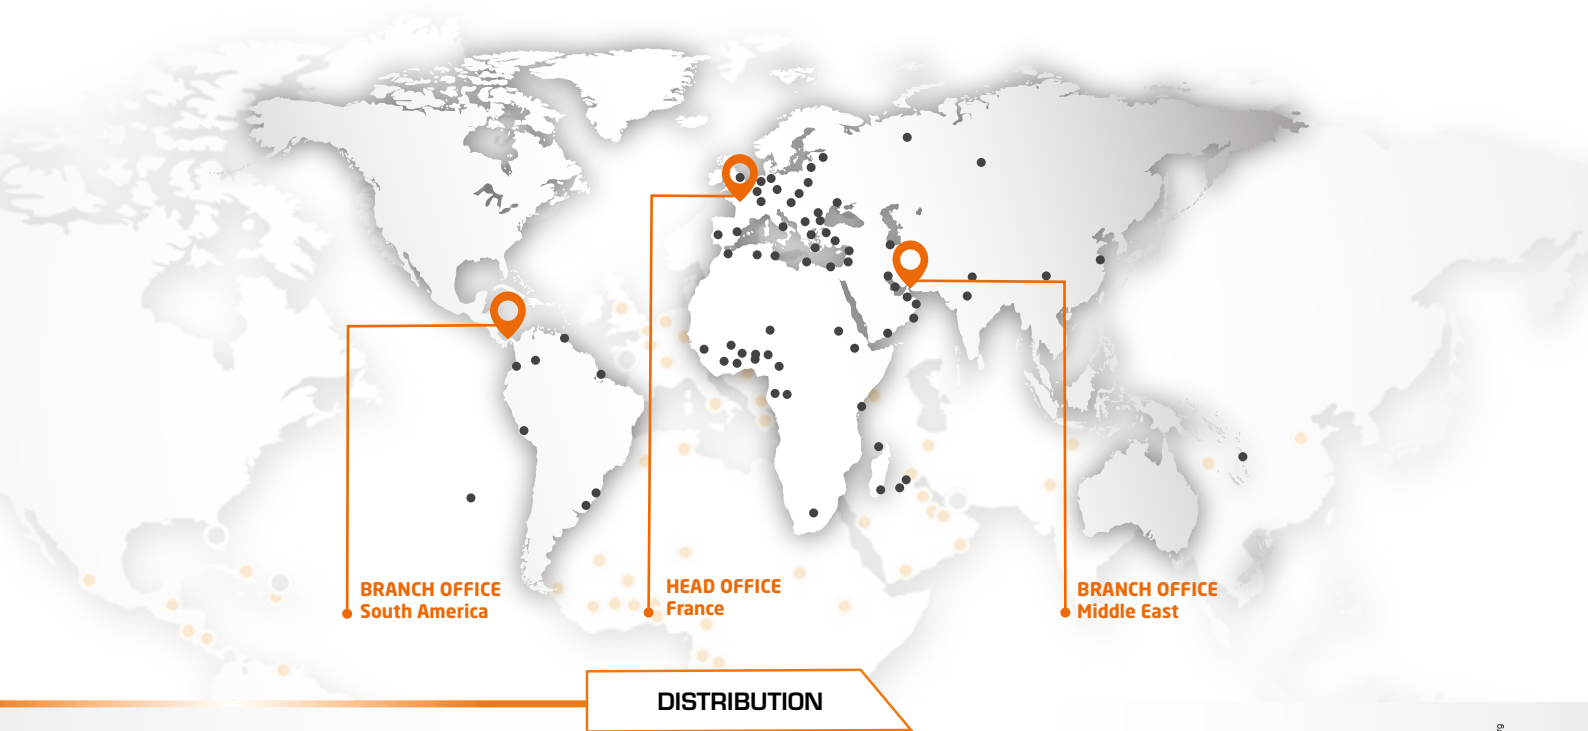

BRANCH OFFICE
South America

HEAD OFFICE
France

BRANCH OFFICE
Middle East

DISTRIBUTION

The INFOSEC UPS SYSTEM™ brand is now represented in over 100 countries via a series of local distribution partners.

INFOSEC UPS SYSTEM™ products are distributed in France and worldwide via several distribution channels (IT, Electrical, Retail and Web) which are coordinated by INFOSEC sales teams through wholesalers, distributors and retail partners.

PEFC 103-11614 / Cette entreprise a fait certifier sa chaîne de comble / pefc-france.org

INFOSEC COMMUNICATION SAS
15 rue du Moulin - 44880 SAUTRON - FRANCE
Tél. : +33 (0)2 40 76 13 94
Fax : +33 (0)2 40 94 29 51
Email : sales@infosec.fr

+33 (0)2 40 76 15 60
sales@infosec.fr

Export sales department

www.infosec-ups.com



©2024 Infosec Communication SAS. Infosec UPS System is a registered trademark of Infosec Communication. All other trademarks are the property of their respective owners. Photos are not contractual. Specifications subject to change without notice. Prices generally observed, each reseller remains free to set their selling prices. Prices subject to monthly revision according to the evolution of the cost of raw materials. 03 24 103 AA 111 08